

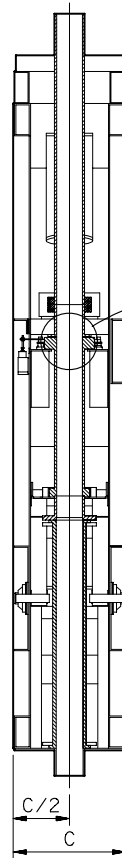


SEVEN POSITION HEAVY DUTY SWITCH

MODEL 316, 319 & 324

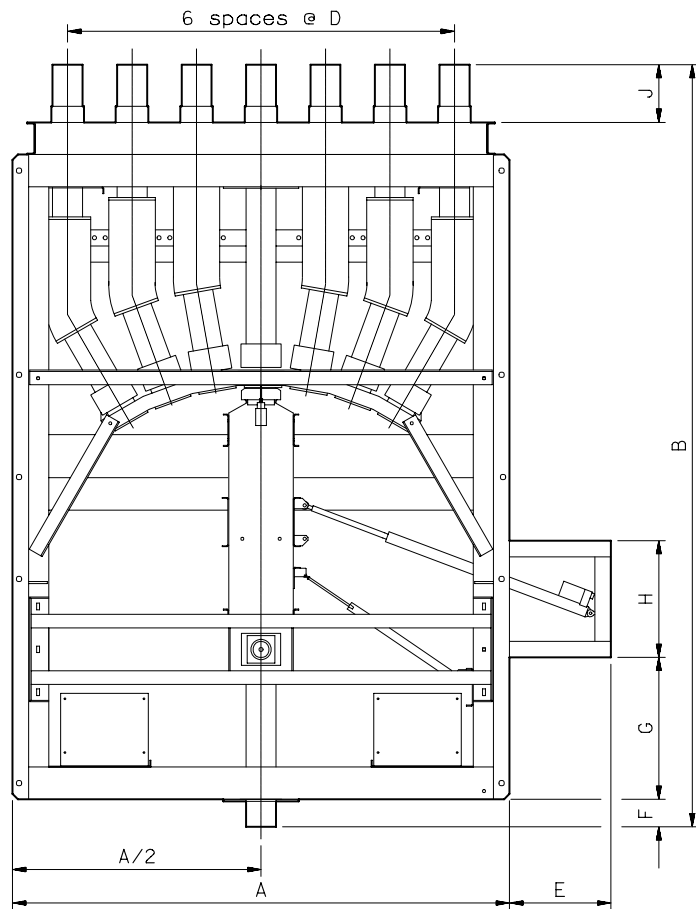

THE **NOLTEC** SEVEN POSITION SWITCH IS DESIGNED FOR TROUBLE-FREE CONVEYING OF DRY, ABRASIVE, AND DIFFICULT-TO-HANDLE MATERIALS. IT PROVIDES UNRESTRICTED FLOW OF MATERIAL TO ONE OF SEVEN DIFFERENT LOCATIONS.

Model	Size	A	B	C	D	E	F	G	H	J	Ship Wt.
324	2" & 3"	6'-0"	9'-2"	1'-6"	9"	1'-8"	4"	1'-11"	1'-10"	6"	2500 lbs
316	4" & 5"	7'-9"	11'-10"	1'-9"	1'-0"	1'-7"	5"	2'-2"	1'-10"	11"	3000 lbs
319	6" & 8"	10'-9"	17'-8"	2'-7"	1'-4"	6"	7"	2'-4"	2'-0"	8"	5000 lbs

STANDARD FEATURES:

- Abrasion resistant tube with integral seal
- Uniform & smooth internal bore minimizes cross contamination
- Electrical positioner selects flow direction
- Dual sealing air cylinders provide positive dust-tight operation
- Conveying pressure up to 90 PSIG
- Heavy-duty steel construction
- Suitable for diverging or converging applications
- Electrical components suitable for outdoor service
- Limit switch and pressure switch used to indicate sealing function
- Linear sensor used to indicate position

OPTIONAL FEATURES:

- Elbows per customer specifications
- Flanged or grooved conveying line connections
- Stainless construction
- Weather protection covers
- FDA components

SPECIFICATIONS:

- Maximum temperature 180° F
- Air:
 - Clean and dry at correct pressure dew point
 - 80 PSIG minimum
- Electrical:
 - Solenoid valve - 110-120V, 50/60HZ
 - Limit switch - DPDT, 10 amp
 - Linear actuator & sensor - 110-120v, 50/60HZ

316-319-324-06-03



Specifications subject to change without notice.

5.030.SALE.01.18.07.01