


TWO-WAY GRAVITY SWITCH

MODEL 343

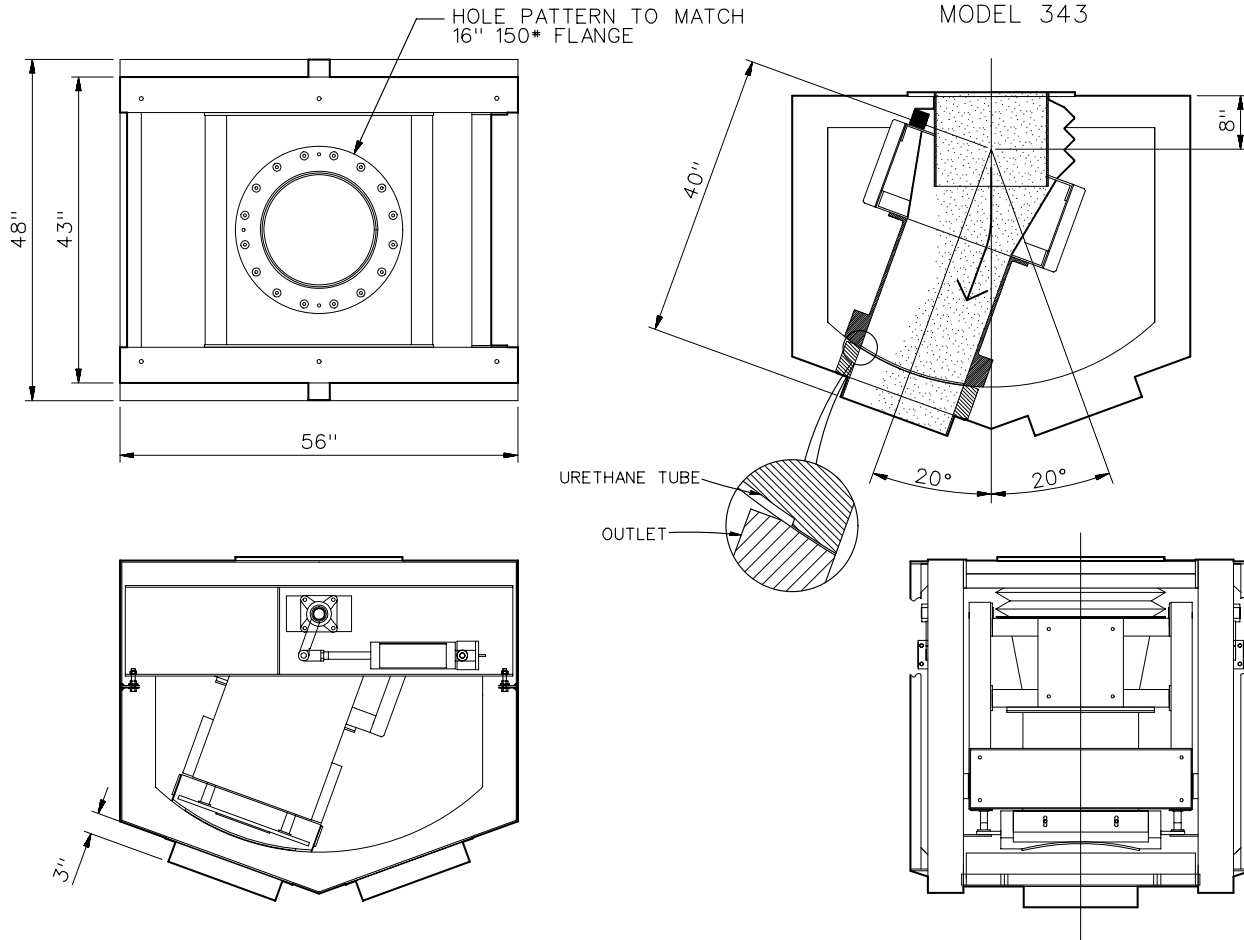

THE **NOLTEC** TWO-WAY SWITCH IS DESIGNED FOR THE TROUBLE-FREE GRAVITY FEEDING OF DRY, ABRASIVE, AND HARD-TO-HANDLE MATERIALS. THIS UNIQUE SWITCH ELIMINATES PRODUCT LEAKAGE AND CROSS-CONTAMINATION

STANDARD FEATURES:

- One-piece abrasion resistant urethane tube with integral seal
- Flexible boot at pivot point for dust containment
- One, "positioning" air cylinder which selects direction of flow.
- Dual, "sealing" air cylinders provide positive dust-tight operation
- Limit switches used to indicate position and sealing function
- Heavy duty steel construction
- Inlet attaches directly to flange of feed hopper
- Access covers
- 16" inlet and outlets
- Air controls & NEMA 12 electrical components

OPTIONAL FEATURES:

- Stainless product contact
- Stainless construction
- Weather protection covers
- FDA

SPECIFICATIONS:

- Maximum temperature - 200° F
- Air:
 - Clean and dry at correct pressure dew point
 - 80 PSIG minimum
- Electrical:
 - Solenoid valve - 110-120V, 50/60HZ
 - Limit switch - DPDT, 10 AMP