



# Model 357C USDA-ACCEPTED BLENDING CONE

The NOL-TEC USDA-accepted blending cone for dry dairy applications homogeneously blends dry materials in pneumatic transporters or atmospheric bins.

## STANDARD FEATURES:


- Six air injection valve assemblies
- Single solenoid valve sequences air injection valve assemblies
- Stainless steel valve seat directs air into material at various angles
- USDA-3A-compliant o-rings and gaskets
- Ferruled manifold connections
- Non-restrictive discharge valve with positive position indicator
- External replacement of wear parts
- Ra32 finish (or better) on product contact surfaces
- Controls: solenoid valve, manifold, regulator, and hoses

## OPTIONAL FEATURES:

- Individual air injection solenoid valves for sequential valve actuation
- Explosion-proof electrical

## SPECIFICATIONS:

- **Blending Air:** Dry and filtered to USDA standards; 80 PSIG regulated to required pressure
- **Control Air:** Clean and dry at correct pressure dew point; 80 PSIG minimum
- **Electrical:** 110-120V; 50-60Hz
- **Temperature:** 200° F maximum
- **Weight:** 225 lbs

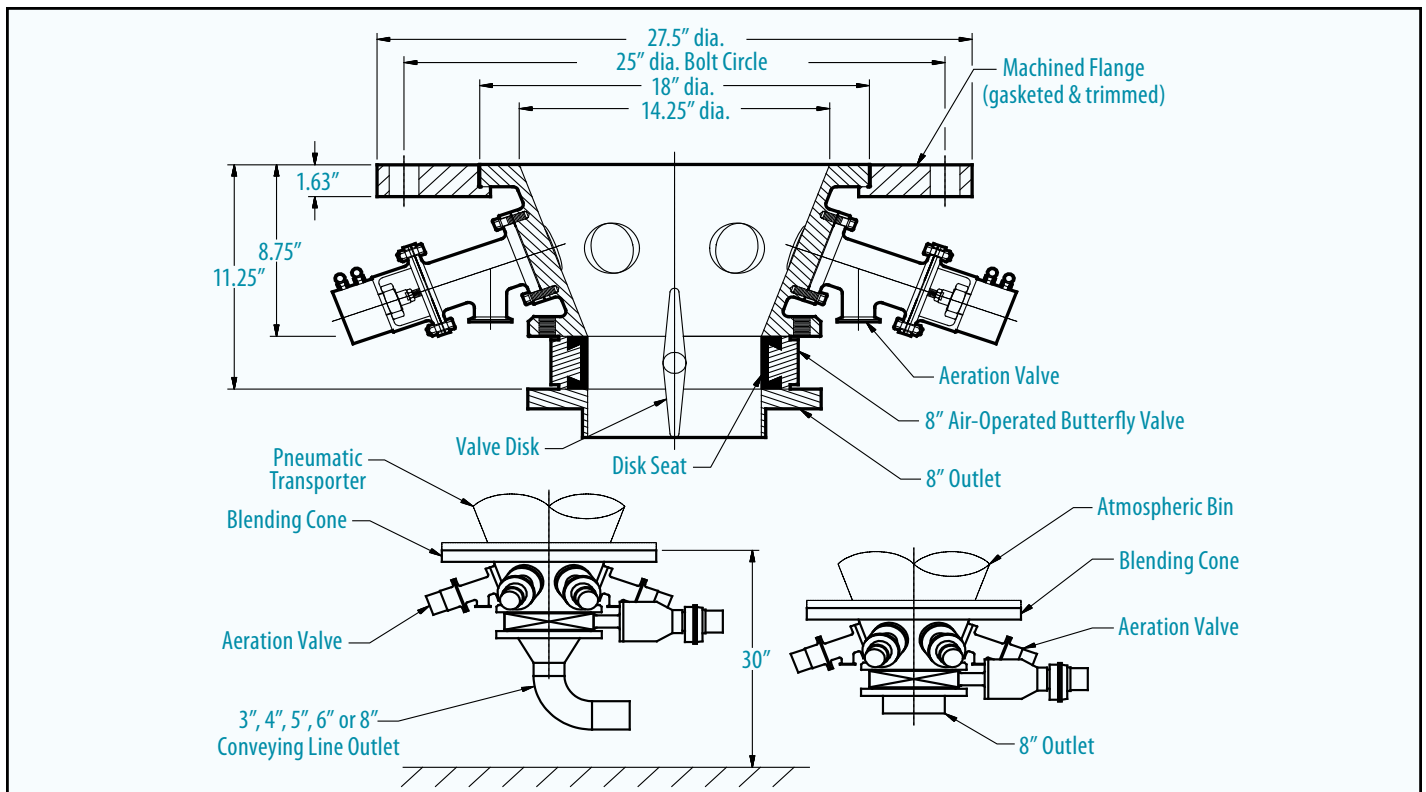

Specifications subject to change without notice.

**Nol-Tec Systems, Inc.**

425 Apollo Drive

Lino Lakes, MN 55014

(651) 780-8600 • (651) 780-4400 fax

sales@nol-tec.com • www.nol-tec.com